

CSU550AP

550 Watts Distributed Power System

Data Sheet

Front-end Bulk Power
Total Output Power:
 550 W continuous
Wide Input Voltage:
 90 - 264 Vac; 164 - 320 Vdc



SPECIAL FEATURES

- 550 W output power
- High power and short form factor
- 1U power supply
- High density design: 17 W/in³
- Active Power Factor Correction
- EN61000-3-2 Harmonic compliance
- Inrush current control
- 80plus Platinum efficiency
- N+M redundant N+M ≤ 4
- Hot-pluggable
- Active current sharing
- Full digital control
- PMBus compliant
- Accurate input power reporting
- Reverse airflow option

COMPLIANCE

- Conducted/Radiated EMI Class A
- EN61000-4-11

SAFETY

- UL/cUL
- UL + CB Report
- CE Mark
- CCC
- BSMI
- KC
- TÜV

Electrical Specifications

| Input | | | | | | |
|---|-------------------------------|-------|----------|-------------------|------|---------|
| Input range | 90 - 264 Vac; 164 - 320 Vdc | | | | | |
| Frequency | 47 Hz to 63 Hz | | | | | |
| Efficiency | 80plus Platinum efficiency | | | | | |
| Max input current | 8.0 Arms @ 90 Vac | | | | | |
| Inrush current | 10 Apk | | | | | |
| Conducted EMI | Class A -6 dB | | | | | |
| Radiated EMI | Class A -6 dB | | | | | |
| Power factor | >0.89 beginning at 10% load | | | | | |
| ITHD | <10% beginning at 20% load | | | | | |
| Leakage current | 0.85 mA | | | | | |
| Hold-up time | 13 ms at full load | | | | | |
| Output | | | | | | |
| | Main DC Output | | | Standby DC Output | | |
| | MIN | NOM | MAX | MIN | NOM | MAX |
| Nominal setting (12 V / 1 A, 12 VSB / 0.1 A) | 12.05 | 12.15 | 12.25 | 12.05 | 12.2 | 12.35 |
| Total output regulation range | 11.4 V | | 12.6 V | 11.4 V | | 12.6 V |
| Dynamic load regulation range | 11.4 V | | 12.6 V | 11.4 V | | 12.6 V |
| Output ripple | | | 120 mV | | | 120 mV |
| Output current | 0 | | 45 A | 0 | | 2.5 A |
| Current sharing | Within ±5% @ full load rating | | | N/A | | |
| Capacitive loading | 500 µF | | 25000 µF | 100 µF | | 3100 µF |
| Start-up from AC to output | | | 3000 ms | | | 1500 ms |
| Output rise time | 5 ms | | 70 ms | 1 ms | | 25 ms |

Electrical Specifications

| Protections (Main Output) | | | | | |
|----------------------------|---------|---------|---------|-------|---|
| | Minimum | Nominal | Maximum | Units | Comment |
| Peak current | | | 54 | A | |
| Output OCP | 55 | | 62 | A | |
| Dynamic loading setup | 11.4 | | 12.6 | V | 60% rated load step, 0.5 A/ μ s slew rate; 2000 μ F / 1 A min |
| Output OVP | 13.3 | | 14.5 | V | Latch |
| Overtemperature protection | | Yes | | | |
| Fan fault protection | | Yes | | | |
| Standby Output | | | | | |
| Peak current | | | 2.75 | A | |
| Output OCP | 3.0 | | 4.5 | A | |
| Output OVP | 13.3 | | 14.5 | V | |
| Dynamic loading setup | | | \pm 5 | % | Load step 1A, Slew rate: 0.5 A / μ s / 100 μ F |


Electrical Specifications

| LED Indicators | |
|--|---|
| POWER SUPPLY CONDITION | LED STATE |
| Normal work | GREEN |
| No AC power to all power supplies | OFF |
| AC present / Only 12 VSB on (PS off) or PS in CR state | 1 Hz Blink GREEN |
| AC cord unplugged; with a second power supply in parallel still with AC input power | RED |
| Power supply warning events where the power supply continues to operate; high temp, high power, high current, slow fan, input voltage lower than 90 Vac (not warning above 90 V condition, must be warning state below 85 V condition) | 1 Hz Blink RED |
| Power supply critical event causing a shutdown; failure, OCP, OVP, fan fail | RED |
| Firmware Reporting And Monitoring | |
| | Accuracy Range |
| Output loading | 10% to 30% > 30% to 50% > 50% to 100% |
| READ_PIN and READ_EIN | \pm 6 W \pm 3% \pm 2% |
| READ_IOUT | \pm 0.4 A \pm 2% \pm 2% |
| READ_TEMPERATURE | \pm 3 °C |

Timing Specifications

| | Description | Min | Max | Unit |
|-----------------------|--|-----|------|------|
| T_{vout_rise} | 12 V main output voltage rise time | 5.0 | 70 | ms |
| | 12 VSB output voltage rise time | 1 | 25 | ms |
| $T_{sb_on_delay}$ | Delay from AC being applied to 12 Vsb being within regulation | | 1500 | ms |
| $T_{ac_on_delay}$ | Delay from AC being applied to all output voltages being within regulation | | 3000 | ms |
| T_{vout_holdup} | Time 12 V _I output voltage stay within regulation after loss of AC | 13 | | ms |
| T_{pwok_holdup} | Delay from loss of AC to de-assertion of PWOK | 12 | | ms |
| $T_{pson_on_delay}$ | Delay from PSON# active to output voltages within regulation limits | 5 | 400 | ms |
| T_{pson_pwok} | Delay from PSON# deactivate to PWOK being de-asserted | | 5 | ms |
| T_{pwok_on} | Delay from output voltages within regulation limits to PWOK asserted at turn on | 100 | 500 | ms |
| T_{pwok_off} | Delay from PWOK de-asserted to output voltages dropping out of regulation limits | 1 | | ms |
| T_{pwok_low} | Duration of PWOK being in the de-asserted state during an off/on cycle using AC or the PSON signal | 100 | | ms |
| T_{sb_vout} | Delay from 12VSB being in regulation to O/Ps being in regulation at AC turn on | 50 | 1000 | ms |
| T_{12VSB_holdup} | Time the 12VSB output voltage stays within regulation after loss of AC | 70 | | ms |


Timing Diagram

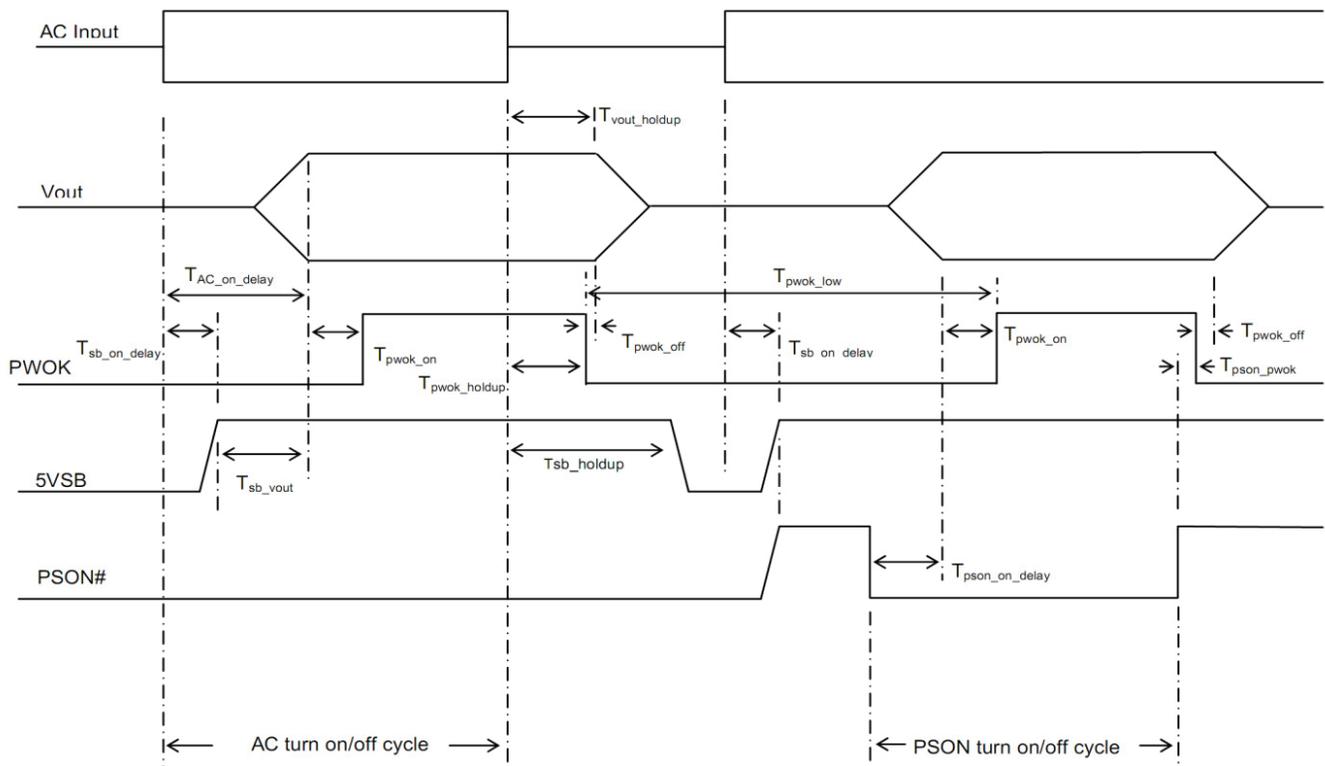


Environmental Specifications

| | |
|-------------------------------|---|
| Operating temperature | 0 to 50 °C, the maximum operating temperature (50 °C) is to be derated by 1 °C per 300 m above 2000 m |
| Operating altitude | up to 5000 m |
| Operating humidity | +5% to +85% non-condensing |
| Storage temperature | -40 °C to +70 °C, non-condensing |
| Storage humidity | +5% to +95% non-condensing |
| Non-operating altitude | up to 15,200 meters |
| Vibration and shock | Standard operating/non-operating random shock and vibration |
| RoHS compliance | Yes |
| MTBF | 250,000 hours per Telcordia Issue 2, Method 1, Case 3 at 25 °C ambient at full load |

Mechanical Outline

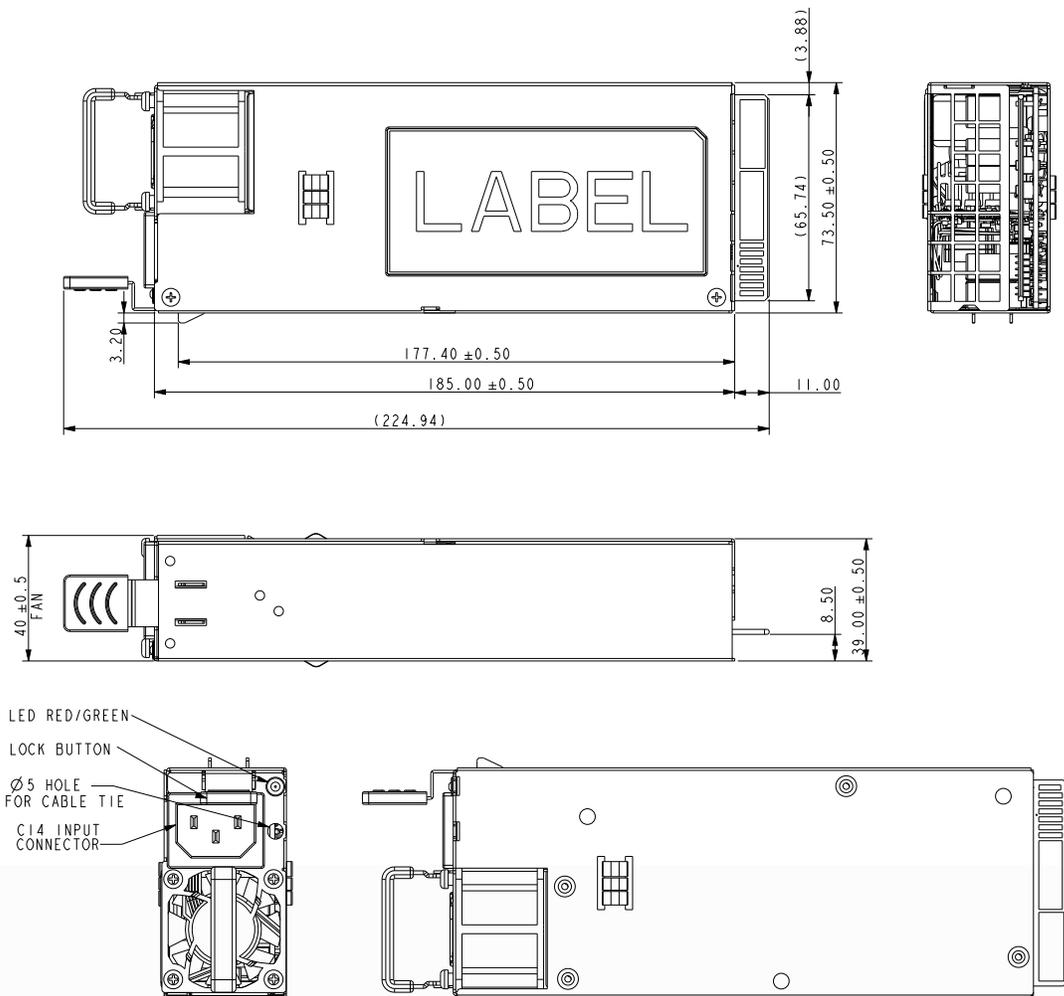

Power Supply Output Card Edge

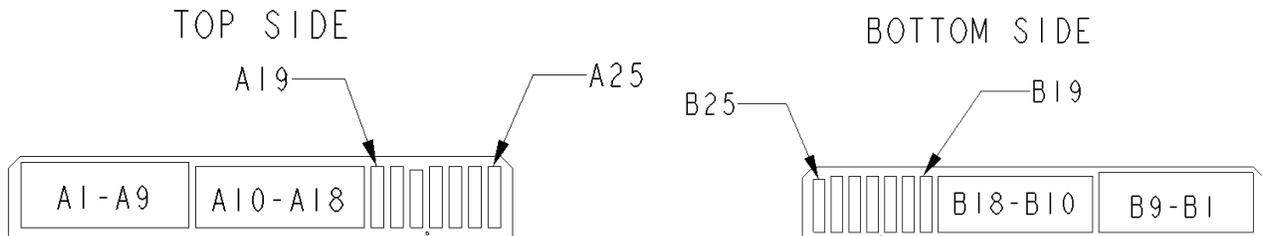

Connector Definitions

| | |
|------------------------------|---|
| Output connector part number | Card-edge |
| Mating connector part number | 2x25 pin configuration of the FCI power card connector 10035388-102LF |

Output Connector Pin Configuration

| Pin | Name | Pin | Name |
|---------|-----------|---------|--------------------|
| A1-A9 | GND | B1-B9 | GND |
| A10-A18 | +12 V | B10-B18 | +12 V |
| A19 | SDA | B19 | A0 (SMBus address) |
| A20 | SCL | B20 | A1 (SMBus address) |
| A21 | PSON | B21 | 12 VSB |
| A22 | SMBAlert# | B22 | CR_BUS# |
| A23 | -VSENSE | B23 | 12 V load share |
| A24 | +VSENSE | B24 | Present |
| A25 | PWOK | B25 | Reserved |

Note: PSON connect to GND for power up.

Ordering Information

| Model number | Airflow | Nominal Output Voltage | Set Point | Regulation Band | Minimum Current | Maximum Current | Output Ripple P/P | Standby |
|----------------|-------------|------------------------|-----------------|-----------------|-----------------|-----------------|-------------------|----------------|
| CSU550AP-3 | Normal fan | 12.0 Vdc | 11.9 - 12.1 Vdc | 11.4 - 12.6 Vdc | 0 A | 45 A | 120 mV | 12.0 V @ 2.5 A |
| CSU550AP-3-001 | Reverse fan | 12.0 Vdc | 11.9 - 12.1 Vdc | 11.4 - 12.6 Vdc | 0 A | 45 A | 120 mV | 12.0 V @ 2.5 A |

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYNTM
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

CSU550AP DS 04Dec2019