

## AVE350-24 Series

350 Watts

### Data Sheet

**Total Power:** 350 Watts  
**Input Voltage:** 18 - 36V  
**# of Outputs:** Single

### SPECIAL FEATURES

- 2:1 Wide input range
- Extra wide trim range  
14 V - 33 V for 28 Vo
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- Super high efficiency
- High capacitive load capability
- Basic insulation system
- Aluminium substrate design

### SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



### Electrical Specifications

#### Input

Input range:	18 - 36 VDC
Efficiency <sup>2</sup> :	94%

#### Output

Voltage tolerance:	+/-1%
Line regulation:	±0.5%
Load regulation:	±0.5%
Noise/ripple:	300 mV
Over voltage protection:	Latch off
Over temperature protection:	Auto-restart
Switching frequency:	220 KHz
Temperature coefficient:	±0.02/°C

#### Isolation

I/O isolation:	1500 VDC min.
----------------	---------------

### Environmental Specifications


Operating ambient temperature range:	-40 °C to +85 °C
Storage temperature:	-55 °C to +125 °C
Humidity:	5% to 95% (non-condensing)
MTBF:	1 Million hours
RoHS Compliant	

## Ordering Information

Model number	Input voltage	Output voltage	Power
AVE350-24S28-6	18-36 Vin	28 V @ 12.5 A	350 W
AVE350-24S28P-6	18-36 Vin	28 V @ 12.5 A	350 W

- Standard version is negative enable
- "-6" = 3.8mm pin length
- "-P" = Positive enable

## Mechanical Drawings

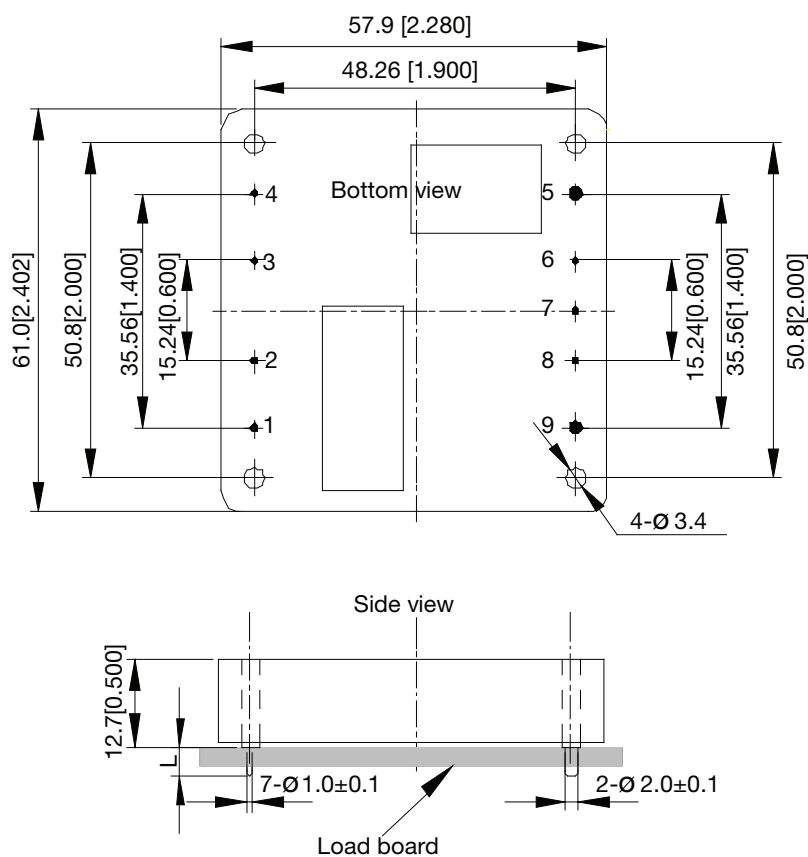

Unit: mm[inch]

Bottom view: pin on upside

Tolerance: X.Xmm±0.5mm[X.X in.±0.02in.]  
X.XXmm±0.25mm[X.XX in.±0.01in.]

## Pin length option

Device code suffix	L
-4	4.8mm $\pm$ 0.2mm
-6	3.8mm $\pm$ 0.2mm
-8	2.8mm $\pm$ 0.2mm
None	5.8mm $\pm$ 0.2mm

## Pin Designations

Pin No.	Name	Function
1	V <sub>in</sub> +	Positive input voltage
2	CNT	Remote control
3	Case	Pin connected to baseplate
4	V <sub>in</sub> -	Negative input voltage
5	V <sub>o</sub> -	Negative output voltage
6	S-	Negative sense
7	Trim	Output voltage trim
8	S+	Positive sense
9	V <sub>o</sub> +	Positive output voltage

### Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

## WORLDWIDE OFFICES

### Americas

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

### Europe (UK)

Ground Floor Offices, Barberry House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**<sup>TM</sup>  
An Advanced Energy Company

[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)