

AVO120 Series

120 Watts

Data Sheet

Total Power: 120 Watts
Input Voltage: 36 - 75 V
of Outputs: Single

SPECIAL FEATURES

- 2:1 wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Pre-bias start-up capability
- Through-hole or SMT termination
- Open frame structure with baseplate option

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



Electrical Specifications

Input	
Input range	36 - 75 VDC
Efficiency ²	93% @12 Vo
Output	
Maximum power	+/-1.6%
Line regulation	+/- 6 mV
Load regulation	+/- 10 mV
Noise/ripple	65 mV
Overvoltage protection Overtemperature protection	Auto-restart
Switching frequency	165 KHz
Temperature co-efficient	±0.02 /°C
Isolation	
I/O isolation	2000 VDC min.

Environmental Specifications


Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-55 °C to +125 °C
Humidity	5% to 95% (non-condensing)
MTBF	1.5 Million hours
RoHS compliant	

Ordering Information

Model number	Input voltage	Output voltage	Power
AVO120-48S12-4L	36 - 75 Vin	12 V @ 10 A	120 W
AVO120-48S12-6L	36 - 75 Vin	12 V @ 10 A	120 W
AVO120-48S12B-4L	36 - 75 Vin	12 V @ 10 A	120 W
AVO120-48S12B-6L	36 - 75 Vin	12 V @ 10 A	120 W
AVO120-48S12P-4L	36 - 75 Vin	12 V @ 10 A	120 W
AVO120-48S12P-6L	36 - 75 Vin	12 V @ 10 A </td <td>120 W</td>	120 W
AVO120-48S12PB-4L	36 - 75 Vin	12 V @ 10 A	120 W
AVO120-48S12PB-6L	36 - 75 Vin	12 V @ 10 A	120 W

- Standard version is negative enable
- "-6" = 3.8 mm pin length
- "-4" = 4.8 mm pin length
- "-P" = Positive enable
- "-B" = Baseplate

Mechanical Drawings

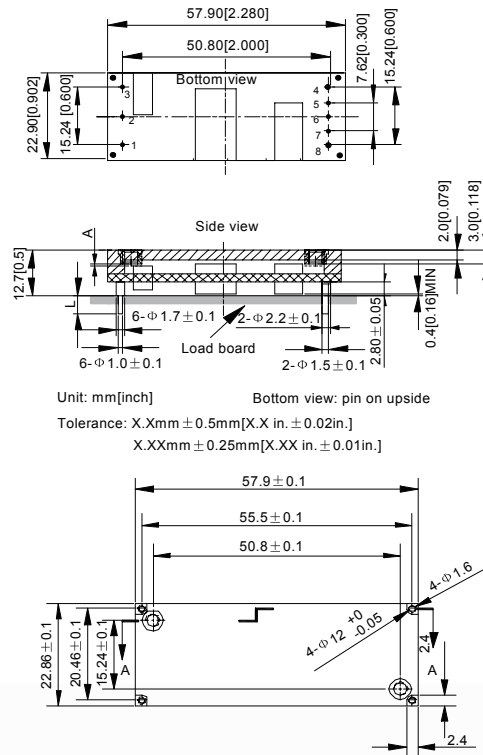

Notes:

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 years
3. Label and logo appearance may vary from what is shown on mechanical drawings.

Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	- Sense
6	Trim
7	+Sense
8	+V out

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberrry House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYNTM
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

AVO120 Series 28Nov2019